


Features

- Compact
- Light weight
- High gain
- Wide bandwidth
- Low cost




Applications

Bluetooth, Wireless LAN, PHS, PDC, etc.

Specifications

Part Number	Band Width MHz	Peak Gain	VSWR In BW	Impedance Ohm
CLBA64-2R450G-S2	2400-2500	2.0 dBi	< 2.0	50
	Operating Temperature Range: -40 ~85 °C Storage Temperature Range: --40 ~85 °C Power Capacity: 3 W max			

Typical Matching Performance

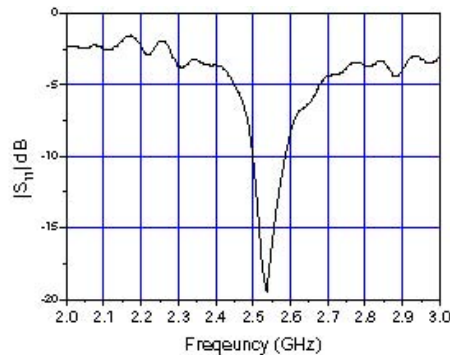

Typical Radiation Pattern

